



ERREPI STRUMENTI

ERREPI INSTRUMENTS



PH 220S

Phmetro per uso alimentare con sonda a penetrazione + soluzioni.
Ph meter for alimentary use and soil, pen type, separated electrode and buffer solutions.



PH 220

Phmetro per per uso alimentare con elettrodo specifico per liquidi + soluzioni.
Ph meter for alimentary use, pen type, separated electrode and buffer solutions.



PH 223

Phmetro con elettrodo incorporato + soluzioni.
Ph meter pen type with incorporated electrode, ATC, buffer solutions.



PH 221E

Phmetro professionale completo di elettrodo e sonda di temperatura + soluzioni.
Professional Ph meter with separated electrode and separated temperature probe 0+65°C, buffer solutions.



6011

Phmetro con elettrodo incorporato, waterproof, 0-14.0PH.
Pen type Ph meter, waterproof, 0-14.0PH.

6021

Conduttivimetro con sonda incorporata, waterproof, 0-19990 μ S/cm.
Pen type conductivity meter waterproof 0-19990 μ S/cm.



PCD 431

Conduttivimetro tipo penna con sensore EC e temperatura incorporati.
Conductivity meter, pen type, incorporated EC probe and temperature sensor.



YK 43CD

Conduttivimetro con sonda in carbonio - soluzione EC 1413mS.
Professional conductivity meter with separated carbon electrode, 1.999mS and 19.99mS.



Soluzioni

Soluzioni calibrazione per phmetri e conduttivimetri.
Buffer solutions for calibration, cleaning electrode and keeping.

7953

Termometro per freezer
con sensore -50+70°C.

Thermometer with indoor -5+50°C,
outdoor -50+70°C, external probe for nursery,
food, refrigeration, homes.office .



7953N

Termometro per freezer con sensore
e cavetto, -50+70°C, con allarme.
Fridge thermometer with sensor and
cable, -50+70°C, temperature alarm.



1034 T

Termometro per freezer
con sensore -50+70°C, protezione IP65.

Thermometer with indoor -5+50°C,
outdoor -50+70°C, external probe for nursery,
food, refrigeration, homes.office, IP65.



7853

Termometro ad incasso -50+70°C.

Digital thermometer with external
sensor, for food, refrigeration,
homes, -50+70°C .





LOG 32TH

Datalogger per temperatura e umidità -40+70°C,0-100%RH,memoria per 60,000 misure ,USB,scarico automatico in pdf,intervallo da 30sec a 24 ore.

Thermo-hygro logger , -40+70°C ,0-100%RH with integrated USB ,memory for 60,000 measured values, interval 30 sec to 24 hrs ,automatic output as pdf .

LOG 32T

Datalogger per temperatura -40+70°C,- memoria per 60,000 misure ,USB, scarico automatico in pdf , intervalli da 30 secondi a 24 ore.

Temperature logger , -40+70°C with integrated USB, memory for 60,000 measured values , interval 30 sec to 24 hrs, automatic output as pdf.



RT/A1

Registratore grafico di temperatura inox diametro 160, completo di 52 diagrammi +pennino.

Graphic temperature recorder stainless steel diameter 160, complete with 52 charts and pen.



1033 T

Termometro con cavetto e sonda
-40+200°C, IP65.

Digital control thermometer with
cable and probe, with temperature
alarm, -40+200°C, IP65.



1018 T

Termometro elettronico tascabile con sonda
fissa a punta -40+200°C, Tenuta Stagna.

Digital probe thermometer for household,
business ,hobby and food checks -40+200°C,
waterproof.



PTM 816

Termometro a microprocessore con
sonda, misura -40+230°C .

Microprocessor thermometer with probe,
range -40+230°C .

10511

Termometro elettronico tascabile con sonda fissa a punta -50+300°C.
Digital probe thermometer for universal use , also food checks -50+300°C.



1047

Termometro pieghevole , tascabile con sonda fissa a punta, 60 mm, -50+300°C , IP 65 .
Digital fold-out thermometer in pocket-size, probe 60mm , for easy and universal measurements, also food checks, -50+300°C, IP65.



10504 M

Termometro elettronico tascabile con sonda fissa a punta -50+300°C con allarme.
Digital probe thermometer with temperature alarm, waterproof, -50+300°C.



10500

Termometro elettronico tascabile con sonda fissa a punta -50+150°C.
Digital probe thermometer for universal use , also food checks -50+150°C.





CK131

Termometro digitale con sonda a punta -40+250°C.
Digital probe thermometer -40+250°C.

BT1 - 10500K

Termometro elettronico con sonda fissa -50+300°C .
Digital probe thermometer -50+300°C.



KT300

Termometro elettronico con
sonda fissa -50+300°C.
Digital probe thermometer
-50+300°C.



1015 T

Termometro elettronico con son-
da a punta e cavetto -40+200°C,
Tenuta Stagna.
Digital probe thermometer with
cable for universal use ,ideals for
food checks -40+200°C, Protect
IP65



1503

Termometro elettronico per forno con
sonda e cavetto in acciaio 0+300°C .
Digital probe thermometer for oven with
stainless steel cable .



10514

Termometro elettronico professionale con sonda a punta e cavetto -50+300°C.
Digital professional thermometer with probe and cable -50+300°C.



8124

Termometro elettronico con cavetto e sonda a punta -50+260°C.
Digital probe thermometer with cable -50+260°C.



BT 2

Termometro elettronico con sonda e cavetto -50+300°C, con allarme.
Digital probe thermometer with cable -50+300°C, alarm.

8140

Termoigrometro elettronico con cavetto e sensore,
min/max, -50+70°C, umidità 10%-99%.
Digital thermoigrometer with cable and external
sensor, min/max-50+70°C, humidity 10%-99%.



8160

Termometro elettronico con temperatura min/max,
allarme, interna -5+50°C, esterna -50+70°C.
Digital thermometer with cable and sensor ,
min/max,alarm,internal -50+50°C ,esternal -50+70°C.



8135-SH 102

Termometro elettronico con controllo di min/
max, interno -20+70°C, esterno -50+70°C.
Digital thermometer with min/max control,
internal -20+70°C, esternal -50+70°C.



8150

Termoigrometro elettronico con cavetto e sensore,
min/max e umidità interna/esterna -10+60°C.
Digital thermoigrometer with cable and external sen-
sor , min/max ,internal esternal humidity -10+60°C.





PM 6501

Termometro elettronico tipo K completo di sonda tipo K cm.7,50, -50+400°C.

Digital thermometer type K with probe type K cm. 7,50, -50+400°C.

DT1312

Termometro tipo K a due ingressi completo di sonda tipo K , -40+500°C .

Digital K type thermometer with dual channel for type K probe -40+500°C.



CK 502 A

Sonda professionale tipo K con cavetto, misura -50+400°C.

Professional probe type K with cable, range -50+400°C.


ILD-150

Misuratore di distanza con raggio laser da 0,05a 70 metri,
trasferimento misure su smartphone.
Professional laser distance meter from 0,05 to 70 meters
,transfer measured data to the smartphone.



CK 8891


Termometro professionale con termocoppia
e raggi infrarossi -200+1300°C.
Professional type K thermometer with laser
-200+1300°C.

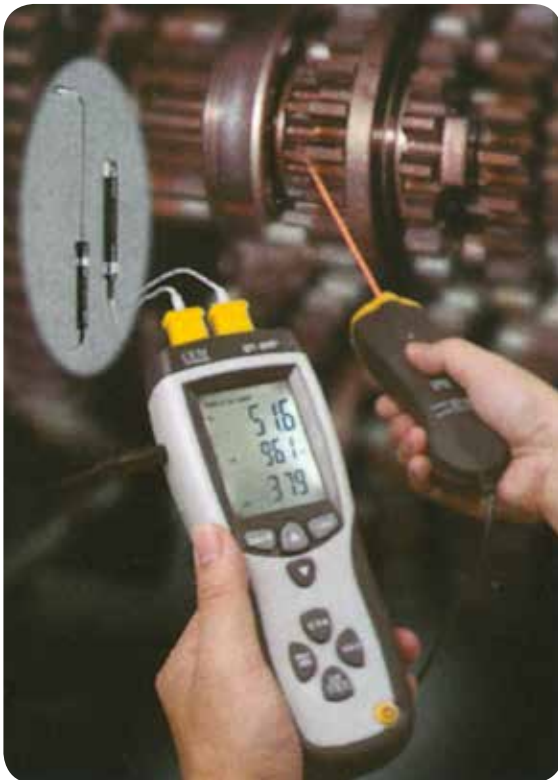

CK 9912

Multimetro.
Compact digital multimeter.



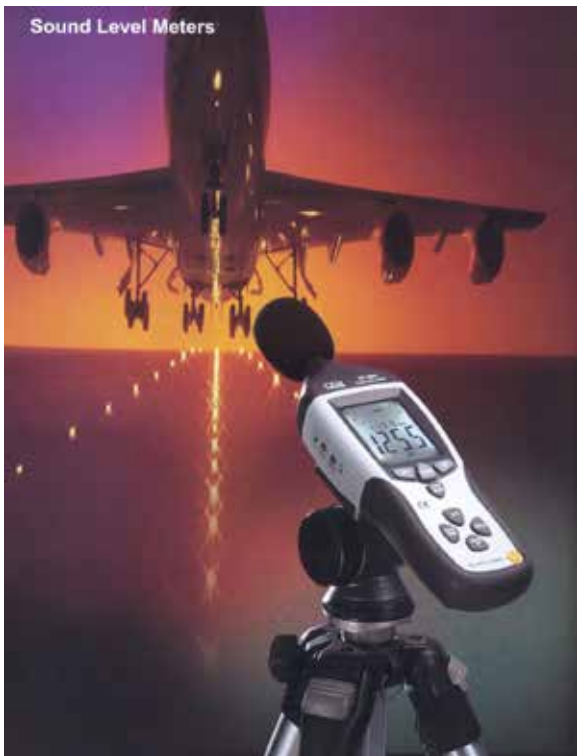


CK 8852

Fonometro professionale completo di accessori.
Professional sound level with accessories.

CK 610B

Termometro termocoppia con sonda a punta -50+400°C.
Digital thermometer type K with probe type K,
cm 7,50, -50+400°C.

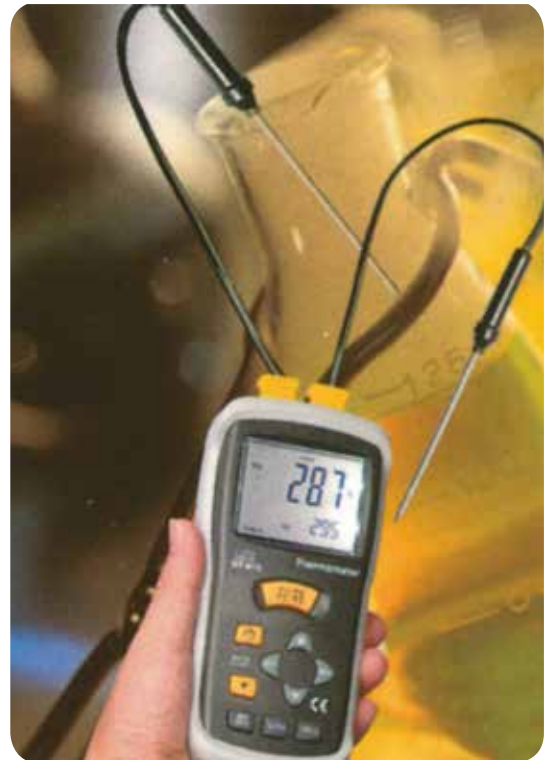


CK 616 CT

Termoigrometro professionale a raggio laser,
misura 0-100%RH e -50+400°C.
Professional thermo-hygrometer with laser,
range 0-100%RH and -50+400°C.

CK 8894

Termoanemometro con raggio laser 0/40Ms, -20+500°C .
Thermo-anemometer with IR temperature, 0/40Ms and
-20+500°C .

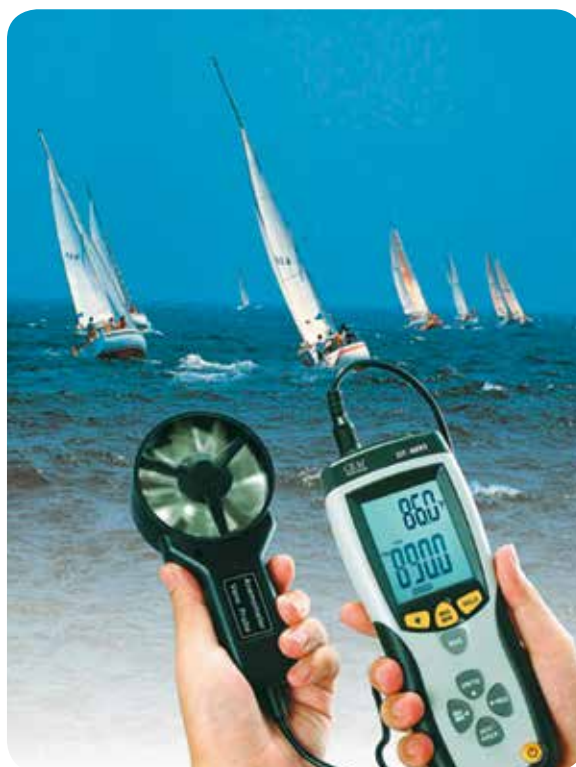

CK 3341-3343

Pinze amperometriche.
Professional AC, AC/DC clamp meter.

CK 1301

Luxometro tascabile, misura 50,000 lux.
Pocket light meter, max range 50,000 lux.





PM 6530 C

Termometro infrarossi con raggio laser -50+800°C, con attacco tipo K.

Infrared thermometer with laser pointer -50+800°C, with type K input for probe.

PM 6530 B

Termometro infrarossi con raggio laser -50+550°C.

Infrared thermometer with laser pointer -50+550°C.

CK 430

Termometro a infrarossi con doppio raggio laser, -60+550°C, tenuta stagna.

Splashproofed infrared thermometer with double laser, optical resolution, -60+550°C.



1115 T

Termometro infrarossi con raggio laser -33+500°C.

Infrared thermometer Scan Temp -33+500°C.

CK 8833-K

Termometro a raggi infrarossi con puntatore laser + sonda di temperatura tipo K, -50+800°C.

Infrared thermometer with laser pointer, -50+800°C, with type K input and type K probe.



CK 8862

Termometro a raggi infrarossi con doppio puntatore laser -50+600°C.

Infrared thermometer with double laser pointer -50+600°C.



CK 77 L

Termometro a raggi infrarossi con puntatore laser -30+270°C.
Pocket infrared thermometer with laser pointer -30+270°C.

LTWE 3-15-30

Bilancia digitale da tavolo, con batteria ricaricabile e cavo alimentazione, kg 3 div.0,1 g; kg 15 div. 0,5 g; kg 30 div. 1 g.

Multifunction compact scale with rechargeable battery and alimentation cable, kg 3:0,1 g; kg 15:0,5 g; kg 30:1 g.

**JA-5-10**

Bilancia digitale da tavolo, con batteria ricaricabile e cavo alimentazione, kg 5 div.0,1 g; kg 10 div. 0,1 g.

Multifunction compact scale with rechargeable battery and alimentation cable, kg 5:0,1 g; kg 10:0,1 g.

JS 6-15-30

Bilancia digitale da tavolo, con batteria ricaricabile e cavo alimentazione, kg 6 div.0,2 g ; kg 15 div. 0,5 g; kg 30 div. 1 g.

Multifunction compact scale with rechargeable battery and alimentation cable, kg 6:0,2 g; kg 15:0,5 g; kg 30:1 g.





ACS 6-15-30

Bilancia digitale da tavolo , con batteria ricaricabile e cavo alimentazione, kg 6 div.1 g; kg 15 div. 2 g; kg 30 div. 5 g.
 Multifunction compact scale with rechargeable battery and alimentation cable, kg 6:1 g; kg 15:2 g; kg 30:5 g.



KD 200

Bilancia da tavolo con batterie e alimentatore,
 kg 2 div.2 g; kg 5 div. 5g.
 Multifunctional compact scale with battery and
 esternal adapter, kg 2:2 g; kg 5:5 g.



YP 6

Bilancia digitale da tavolo con batteria ricaricabi-
 le e cavo alimentazione, kg 6 div. 0,1g.
 Multifunction compact scale with rechargeable
 battery and alimentation cable, kg 6:0,1 g .

PKO 300-04

Bilancia tascabile g. 300 div. 0,01g.
Digital pocket scale, tare function g.300:0,01 g.



PKO 500

Bilancia tascabile g. 500 div. 0,1g.
Digital pocket scale, tare function g.500:0,1 g.



SF 700

Bilancia tascabile g. 500 div. 0,1g.
Digital pocket scale, tare function g.500:0,1 g.



EDR-101

Rifrattometro digitale scala 0-50% brix.
Digital refractometer measure 0-50% brix.

EDR-102

Rifrattometro digitale scala 0-90% brix.
Digital refractometer measure 0-90% brix.

EDR-301

Rifrattometro digitale per miele scala, -90% brix,
38.0-5.0% acqua, 33.0-48.0 Bè.
Digital refractometer for honey, measure 0-90%
brix, 38.0-5.0% water, 33.0-48.0 Bè.



HB 90 ATC

Rifrattometro ottico scala 58-90%brix, 38-43°bè,
12-27% acqua. Mielometro.
Optic refractometer for honey, measure
58-90%brix, 38-43°bè, 12-27% water.





HB 18ATC: Rifrattometro ottico scala 0-20% brix.

Optic refractometer measure 0-20% brix.

HB 32ATC: Rifrattometro ottico scala 0-32% brix.

Optic refractometer measure 0-32% brix .

HB 80ATC: Rifrattometro ottico scala 0-80% brix.

Optic refractometer measure 0-80% brix.

HB K3ATC: Rifrattometro ottico scala brix-babo-Oe, per vino.

Optic refractometer measure brix-babo-Oe, for wine.

HB 28ATC: Rifrattometro ottico scala 0-28% sale.

Optic refractometer measure 0-28% salt.

HB 28-35ATC: Rifrattometro ottico scala 0-28% babo e 0-35% brix.

Optic refractometer measure 0-28% babo and 0-35% brix.


HB 200: Rifrattometro ottico scala 1.10-1.40 batterie -0-50°C etilene - 0-50°C glicole.

Optic refractometer for auto ,anifreeze, 1.10-1.40 battery fluid -0-50°C ethylene glycol - 0-50°C propylen glycol.

ND-4: Rifrattometro ottico per olio, RIFRAZIONE.

Optic refractometer for refractive index 1.440-1.520

FG 5020

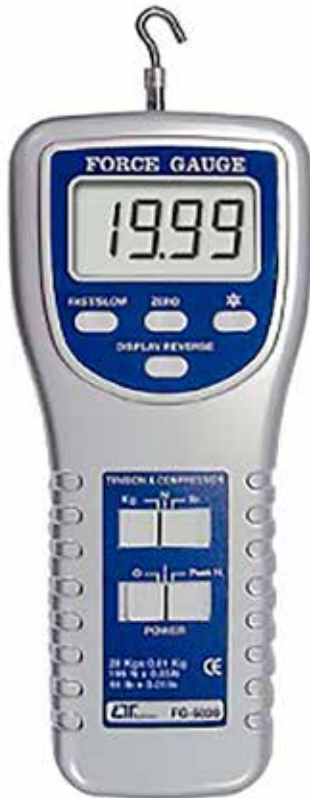

Penetrometro digitale per frutta.
Force gauge 20 kg, kg/LB/Newton, tension and compression with fruit adapter, power adapter 9V and battery.

2060

Microscopio ottico 30x, con luce.
Optical microscope 30x, with light.



1050-1060-2150

1050: Termometro in abs per frigorifero -50+50°C.
Abs thermometer for fridge -50+50°C.

1060: Termometro in moplén per frigorifero, -40+40°C.
Moplén thermometer for fridge -40+40°C.

2150: Termoigrometro da parete diametro 100.
Thermo-hygrometer for wall, diameter 100.



1004-2260-1007

- 1004:** Tester PH-igro-lux.
Tester PH-Hygro-Lux.
- 2260:** Termometro in abs per terreno .
Abs thermometer for soil.
- 1007:** Pluviometro con regolatore .
Plastic rain gauge with support .



1100-6020

- 1100:** Termometro min/max in abs.
Plastic thermometer min/max.
- 6020:** Termometro digitale min/max,
in abs, -50+70°C.
Digital thermometer for indoor out-
door min/max.




982-995-6770

- 982:** Termometro a gabbietta plastica -10+120°C, alcool.
Alcohol thermometer with plastic cage -10+120°C.
- 995:** Termometro a gabbietta plastica, -50+50°C.
Alcohol thermometer with plastic cage, -50+50°C.
- 6770:** Caramellometro a gabbietta metallo +80+180°C.
Sugar thermometer, wire cage +80+180°C.

571-5073-6002

- 571:** Mostimetro babo.
Saccharimeter babo.
- 5073:** Mostimetro grande con termometro alcool.
Big saccharimeter with alcohol thermometer.
- 6002:** Alcoolometro con termometro.
Alcoholometer with thermometer.

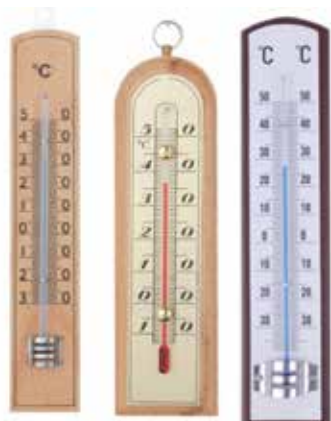

210-520-320

- 210-520:** Termometro in legno da parete .
Wooden thermometer for wall .
- 320-320C:** Termometro in legno da parete .
Wooden thermometer for wall.

A winter landscape with snow-covered trees and a flock of birds flying in the sky. The scene is captured in a monochromatic blue color scheme. The trees are heavily laden with snow, and the ground is a smooth, white expanse. In the upper right, a flock of birds is seen in flight against the sky. The overall atmosphere is serene and cold.

ERREPI di Ranieri Paolo

Via Mazzini, 13

48027 Solarolo (RA) - Italia

Tel. 0546 53216 - Fax 0546 618091

www.errepistrumenti.it

E-mail: info@errepistrumenti.it